


**List of sports supported:**

**Basketball (FIBA levels 2 and 3) - Handball (national) - Volleyball (international)  
Tennis - Table tennis - Badminton - Rink hockey - Floorball - Futsal**



**Also available  
as HOME/GUEST version:**

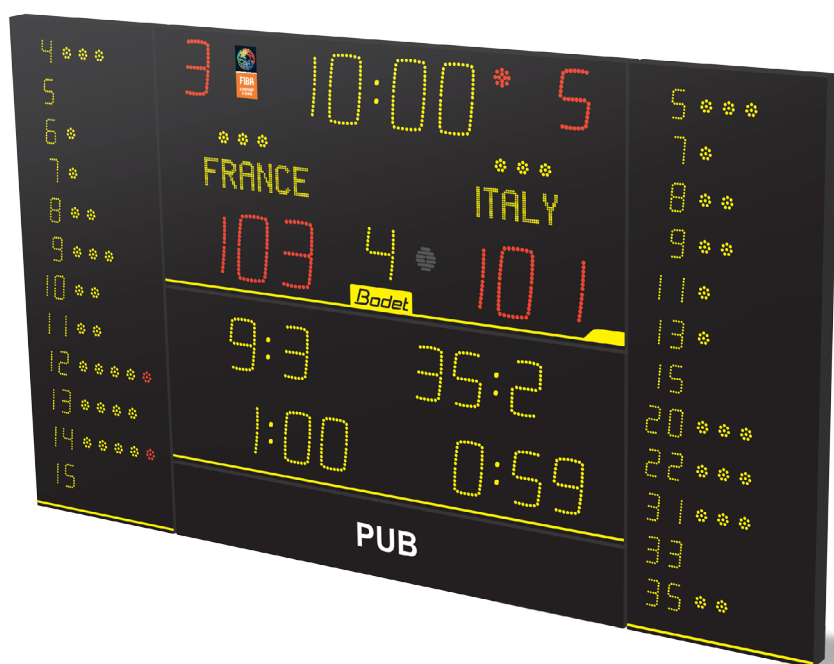

## General characteristics

- Indoor use
- SMD LED technology.
- Brightness adjustable via the Scorepad touch screen. Can be adjusted during a match.
- Team names can be programmed from the Scorepad touchscreen keyboard.
- Built-in horn (120dB at 1 metre).

## Certification and compliance for the marking CE

- RED (radio): EN 301 489-3, EN 300 220-2.
- Electromagnetic compatibility (EMC): EN 55024, EN 55032.
- Low voltage: EN 60950.

## Model reference nos.

- 916 319..... 8T225-F10 HOME/GUEST.
- 916 320..... 8T225-F10 Alpha.
- 916 369..... 8T225-F10 HOME/GUEST + Scorepad.
- 916 370..... 8T225-F10 Alpha + Scorepad.

## Scoreboard display

	Display description	Display characteristics
<b>A</b>	Game clock or local time or time-out timer.....	4 yellow 25cm digits per team.
<b>B</b>	Clock stopped indicator.....	1 red dot.
<b>C</b>	Team fouls.....	1 red 15cm digit per team.
<b>Alpha-numerical version:</b>		
	Team names.....	Max. 11 characters, yellow, 12cm, per team.
<b>D</b>	Scrolling messages.....	Max. 60 characters, yellow, 12cm.
<b>HOME/GUEST version:</b>		
	Stickers.....	Yellow 12cm letters.
<b>E</b>	Time-out indicators.....	3 yellow dots per team.
<b>F</b>	Period number.....	1 yellow 15cm digit.
<b>G</b>	Score.....	3 red 25cm digits per team.
<b>H</b>	Penalty time count or reminder of last individual foul or time-out count or result of previous set.....	4 yellow 20cm digits per team.
<b>I</b>	Player number.....	2 yellow 10cm digits per player.
<b>J</b>	Individual fouls indicators.....	4 yellow dots and 1 red dot per player.
<b>K</b>	Publicity.....	L2000 x H300 mm.

## Technical data

Dimensions.....	L3410 x H2000 x D65.5mm.
Weight.....	185 kg.
Scoreboard construction.....	Steel.
Protection ratings.....	IP20, IK09 (DIN standard 18032).
Optimal reading distance.....	120m.
Reading angle.....	160°.
Power supply.....	230V AC, 50/60Hz.
Power consumption.....	210W.
Protection level.....	16A circuit breaker - curve D.
Communication.....	Keyboard/8T225-F10 link by wire or HF radio.

